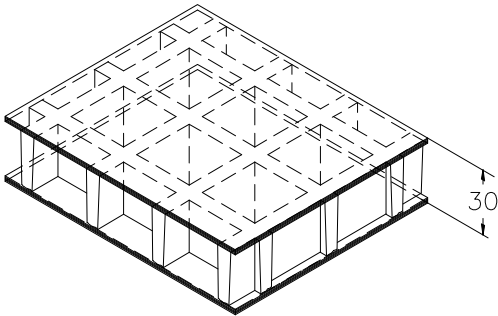


SCH 38/30DC_IFR

ESD line

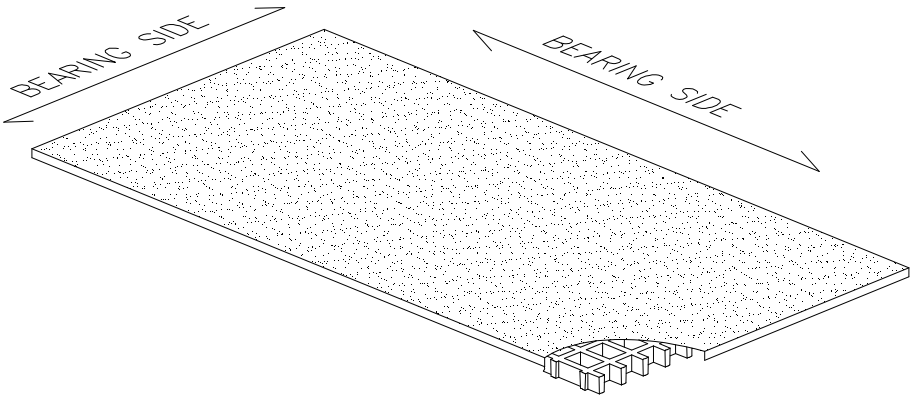
06.05.2011 - Rev. 4

MOLDED GRATINGS

Mesh	mm 38 x 38	
Thickness	mm 36	
Cover thickness	mm 3 upper cover	
	mm 3 bottom cover	
Bearing bar thickness	mm 7 upper part	
	mm 5 bottom part	
Color	Top Coat Black	

Raw materials	Polyester Resin	
	Roving glass fiber + Mat and Woven Fabric type "E"	
	Inorganic fillers without halogens	


Resin type	Modulus of elasticity	Ultimate stress
IFR	15000 MPa	130 MPa

Standard panels	
mm 1000 x 2000	
mm 1000 x 4038	
mm 1220 x 3660	
Weight kg/m² 27,5	
tolerance	± mm 5 panel dimensions
	± mm 2 height

IFR-ESD line	Top Coat Polyester with Carbon black conductive powder	
---------------------	---	--

Surface	A	Quartz	Antiskid level R13 V4 norm DIN 51130
----------------	---	---------------	---



Reaction to fire	Fire retardant	Spread ≤ 25 norm ASTM E84-98
		ASTM D635 Elapsed time and burned length < 25 mm

Surface and Volume electrical resistivity. Dielectric strength	 Antistatic Dissipative	EN 61340-2.3 Par. 8.1 and 8.2 – IEC 61340-4.1 Par. 5.1.2 ref. ISO 1957 – IEC 61340-4.5 – ASTM D149-97a
---	--	---

LOADS



MAXIMUM SUGGESTED LOADS

Type of support	On the line of the two ends of the panel
Limits determined by	Deflection (load sagging)
the maximum deflection admitted , is 1/200 of the distance between the supports	
According to the standard DIN 24537-3 deviation due to the load may be no more than 1/200 of the land width and the difference in height between neighbouring joints between loaded and unloaded floor coverings may be no more than 4 mm.	

DISTIBUTED LOAD			CONCENTRATED LOAD			
	Distance between supports [cm]	Load with deflection equal to 1/200 [kg/m ²]		Load with deflection equal to 1/100	Distance between supports [cm]	Load with deflection equal to 1/200 [cm]
	50	9400	18800	50	2900	5850
	70	3400	6850	70	1500	3000
	90	1600	3200	90	900	1800
	110	850	1750	110	600	1200

All lighter loads are admitted

Limits determined by	Admitted stresses (stress determined by the load)
the maximum admitted stress is 1/5 of the ultimate stress (safety factor is equal to 0.20 – the ultimate stress is 5 times the specified load)	

DISTIBUTED LOAD			CONCENTRATED LOAD		
	Distance between supports [cm]	Maximum admitted load [kg/m ²]		Distance between supports [cm]	Maximum admitted load [kg/m]
	50	9450	50	2350	
	70	4800	70	1650	
	90	2900	90	1300	
	110	1950	110	1050	

All lighter loads are admitted

- The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.
- According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.
- No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M.technical department.
- In case of heavy duty load compressive strength must be verified.