

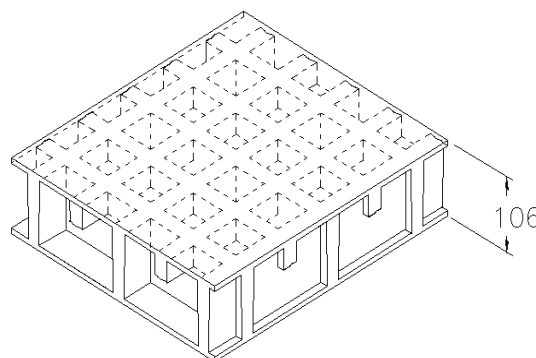
SCH 52/100DC\_IFR

ESD line

06.05.2011 - Rev. 4

## MOLDED GRATINGS

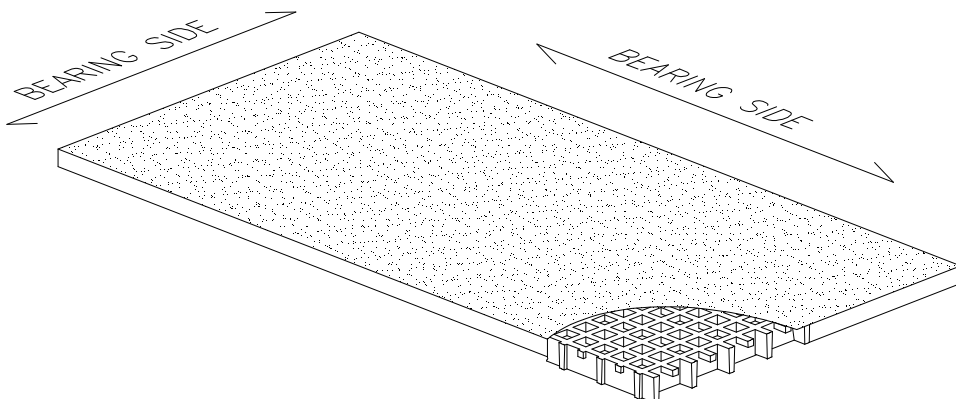
<b>Mesh</b>	mm 52 x 52	main
	mm 26 x 26	secondary
<b>Thickness</b>	mm 106	
<b>Cover thickness</b>	mm 3	upper cover
	mm 3	bottom cover
<b>Bearing bar thickness</b>	mm 10	upper part
	mm 8	bottom part
<b>Color</b>	Top Coat Black	



<b>Raw materials</b>	<b>Polyester Resin</b>	
	<b>Roving glass fiber + Mat and Woven Fabric type "E"</b>	
	<b>Inorganic fillers without halogens</b>	

<b>Resin type</b>	<b>Modulus of elasticity</b>	<b>Ultimate stress</b>
<b>IFR</b>	15000 MPa	130 MPa


<b>Standard panels</b>	
mm 1005 x 1510	
<b>Weight kg/m² 70</b>	
<b>tolerance</b>	± mm 5 panel dimensions ± mm 2 height



<b>IFR-ESD line</b>	<b>Top Coat Polyester with Carbon black conductive powder</b>		
---------------------	---	--	--

<b>Surface</b>	A	<b>Quartz</b>	<b>Antiskid level R13 V4 norm DIN 51130</b>
----------------	---	---------------	---



<b>Reaction to fire</b>	<b>Fire retardant</b>	<b>Spread ≤ 25 norm ASTM E84-98</b>	
		<b>ASTM D635 Elapsed time and burned length &lt; 25 mm</b>	

<b>Surface and Volume electrical resistivity. Dielectric strength</b>	 <b>Antistatic Dissipative</b>	<b>EN 61340-2.3 Par. 8.1 and 8.2 – IEC 61340-4.1 Par. 5.1.2 ref. ISO 1957 – IEC 61340-4.5 – ASTM D149-97a</b>
---	--	---



## LOADS

### MAXIMUM SUGGESTED LOADS

Type of support	On the line of the two ends of the panel
Limits determined by	Deflection (load sagging)
the <b>maximum deflection admitted</b> , is 1/200 of the distance between the supports	
According to the standard DIN 24537-3 deviation due to the load may be no more than 1/200 of the land width and the difference in height between neighbouring joints between loaded and unloaded floor coverings may be no more than 4 mm.	

DISTRIBUTED LOAD			CONCENTRATED LOAD		
					
Distance between supports	Load with deflection equal to 1/200	Load with deflection equal to 1/100	Distance between supports	Load with deflection equal to 1/200	Load with deflection equal to 1/100
[cm]	[kg/m <sup>2</sup> ]		[cm]	[cm]	
80	35450	70950	80	17700	35450
100	18150	36350	100	11350	22700
120	10500	21000	120	7850	15750
140	6600	13200	140	5750	11550
All lighter loads are admitted					

Limits determined by	Admitted stresses (stress determined by the load)
the <b>maximum admitted stress</b> is 1/5 of the ultimate stress (safety factor is equal to 0.20 – the ultimate stress is 5 times the specified load)	

DISTRIBUTED LOAD		CONCENTRATED LOAD	
			
Distance between supports	Maximum admitted load	Distance between supports	Maximum admitted load
[cm]	[kg/m <sup>2</sup> ]	[cm]	[kg/m]
80	19350	80	7700
100	12350	100	6150
120	8600	120	5150
140	6300	140	4400
All lighter loads are admitted			

- The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.
- According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.
- No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M.technical department.
- In case of heavy duty load compressive strength must be verified.