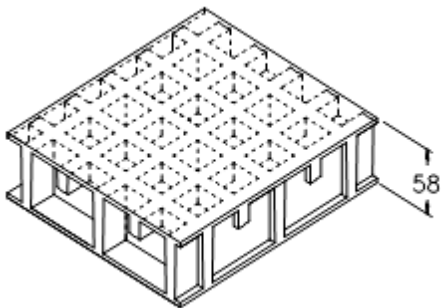


SCH 52/52DC_IFR

ESD line

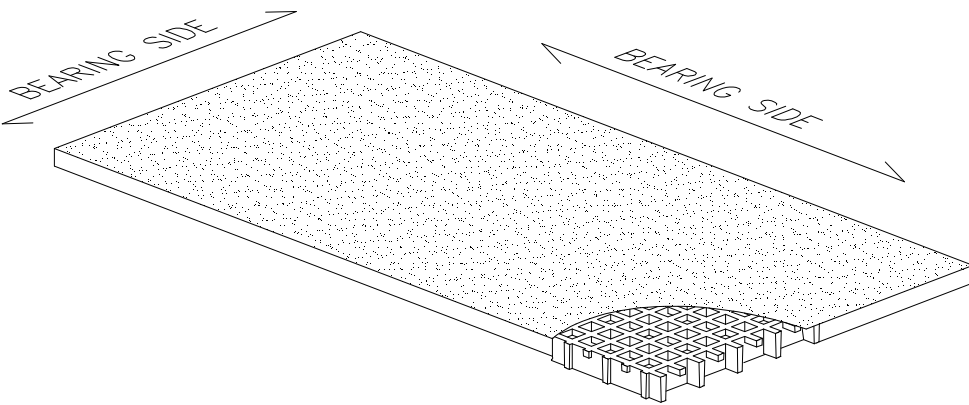
06.05.2011 - Rev. 4

MOLDED GRATINGS

Mesh	mm 52 x 52 main	
	mm 26 x 26 secondary	
Thickness	mm 58	
Cover thickness	mm 3 upper cover	
	mm 3 bottom cover	
Bearing bar thickness	mm 8 upper part	
	mm 7 bottom part	
Color	Top Coat Black	

Raw materials	Polyester Resin	
	Roving glass fiber + Mat and Woven Fabric type "E"	
	Inorganic fillers without halogens	


Resin type	Modulus of elasticity	Ultimate stress
IFR	15000 MPa	130 MPa

Standard panels	
mm 1000 x 3000	
mm 1000 x 4050	
Weight kg/m² 44,5	
tolerance	± mm 5 panel dimensions
	± mm 2 height

IFR-ESD line	Top Coat Polyester with Carbon black conductive powder	
---------------------	---	--

Surface	A	Quartz	Antiskid level R13 V4 norm DIN 51130
----------------	---	---------------	---



Reaction to fire	Fire retardant	Spread ≤ 25 norm ASTM E84-98
		ASTM D635 Elapsed time and burned length < 25 mm

Surface and Volume electrical resistivity. Dielectric strength	 Antistatic Dissipative	EN 61340-2.3 Par. 8.1 and 8.2 – IEC 61340-4.1 Par. 5.1.2 ref. ISO 1957 – IEC 61340-4.5 – ASTM D149-97a
---	--	---

LOADS



MAXIMUM SUGGESTED LOADS

Type of support	On the line of the two ends of the panel
Limits determined by	Deflection (load sagging)
the maximum deflection admitted , is 1/200 of the distance between the supports	
According to the standard DIN 24537-3 deviation due to the load may be no more than 1/200 of the land width and the difference in height between neighbouring joints between loaded and unloaded floor coverings may be no more than 4 mm.	

DISTIBUTED LOAD			CONCENTRATED LOAD			
	Distance between supports [cm]	Load with deflection equal to 1/200 [kg/m ²]		Load with deflection equal to 1/100	Distance between supports [cm]	Load with deflection equal to 1/200 [cm]
	70	10850	21750	70	4750	9500
	90	5100	10200	90	2850	5750
	110	2800	5600	110	1900	3850
	130	1650	3350	130	1350	2750

All lighter loads are admitted

Limits determined by	Admitted stresses (stress determined by the load)
the maximum admitted stress is 1/5 of the ultimate stress (safety factor is equal to 0.20 – the ultimate stress is 5 times the specified load)	

DISTIBUTED LOAD			CONCENTRATED LOAD		
	Distance between supports [cm]	Maximum admitted load [kg/m ²]		Distance between supports [cm]	Maximum admitted load [kg/m]
	70	9450	70	3300	
	90	5700	90	2550	
	110	3800	110	2100	
	130	2750	130	1750	

All lighter loads are admitted

- The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.
- According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.
- No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M.technical department.
- In case of heavy duty load compressive strength must be verified.