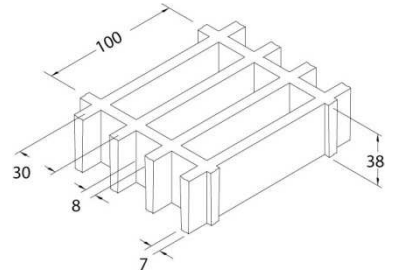


SCH 30/38_IFR

ESD line

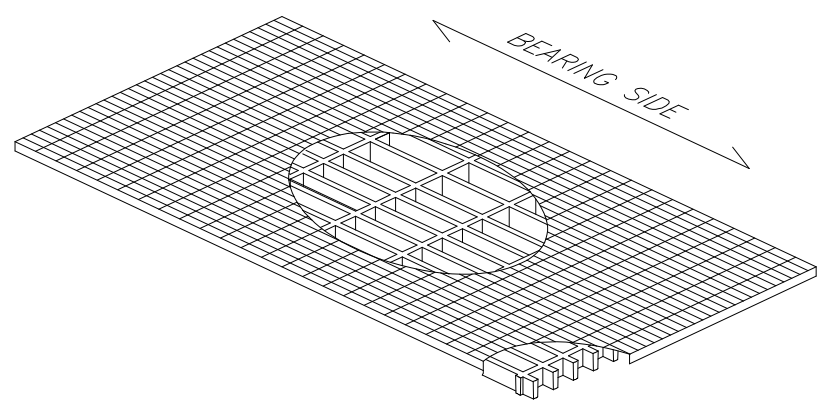
06.05.2011 - Rev. 4

MOLDED GRATINGS

Mesh	mm 100 x 30	
Clear span	mm 92 x 22	
Height	mm 38	
Bearing bar thickness	mm 8 upper part	
	mm 7 bottom part	
Color	Top Coat Black	

Raw materials	Polyester Resin
	Roving glass fiber type "E"
	Inorganic fillers without halogens


Resin type	Modulus of elasticity	Ultimate stress
IFR	15000 MPa	325 MPa

Standard panels	
mm 1200 x 3000	
Weight kg/m² 18	
tolerance	± mm 5 panel dimensions ± mm 2 height

IFR-ESD line	Top Coat Polyester with Carbon black conductive powder
---------------------	---

Surface	A	Quartz	Antiskid level R13 V10 norm DIN 51130
----------------	---	---------------	--



Reaction to fire	Fire retardant	Spread ≤ 25 norm ASTM E84-98
		ASTM D635 Elapsed time and burned length < 25 mm

Surface and Volume electrical resistivity. Dielectric strength	 Antistatic Dissipative	EN 61340-2.3 Par. 8.1 and 8.2 – IEC 61340-4.1 Par. 5.1.2 ref. ISO 1957 – IEC 61340-4.5 – ASTM D149-97a
---	--	---



LOADS

MAXIMUM SUGGESTED LOADS

Type of support	On the line of the two ends of the panel
Limits determined by	Deflection (load sagging)
the maximum deflection admitted , is 1/200 of the distance between the supports	
According to the standard DIN 24537-3 deviation due to the load may be no more than 1/200 of the panel width and the difference in height between neighbouring joints between loaded and unloaded floor coverings may be no more than 4 mm.	

DISTIBUTED LOAD			CONCENTRATED LOAD			
	Distance between supports [cm]	Load with deflection equal to 1/200 [kg/m ²]		Load with deflection equal to 1/100	Distance between supports [cm]	Load with deflection equal to 1/200 [kg/m]
	50	5350	10700	50	1650	3350
	70	1950	3900	70	850	1700
	90	900	1800	90	500	1000
	110	500	1000	110	300	650
All lighter loads are admitted						

Limits determined by	Admitted stresses (stress determined by the load)
the maximum admitted stress is 1/5 of the ultimate stress (safety factor is equal to 0.20 – the ultimate stress is 5 times the specified load)	

DISTIBUTED LOAD			CONCENTRATED LOAD		
	Distance between supports [cm]	Maximum admitted load [kg/m ²]		Distance between supports [cm]	Maximum admitted load [kg/m]
	50	12450	50	3100	
	70	6350	70	2200	
	90	3800	90	1700	
	110	2550	110	1400	
All lighter loads are admitted					

- The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.
- According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.
- No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M. technical department.
- In case of heavy duty load compressive strength must be verified.