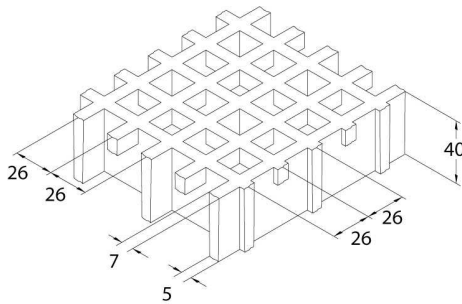


SCH 52/40_IFR

ESD line

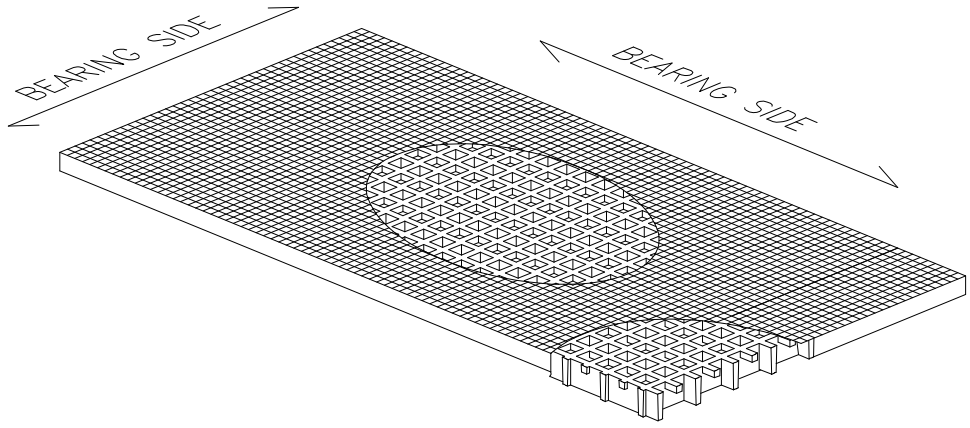
06.05.2011 - Rev. 4

MOLDED GRATINGS

Mesh	mm 52 x 52 main	
	mm 26 x 26 secondary	
Clear span	mm 19 x 19	
Height	mm 40	
Bearing bar thickness	mm 7 upper part	
	mm 5 bottom part	
Color	Top Coat Black	

Raw materials	Polyester Resin
	Roving glass fiber type "E"
	Inorganic fillers without halogens


Resin type	Modulus of elasticity	Ultimate stress
IFR	15000 MPa	325 MPa

Standard panels	
mm 1000 x 2000	
mm 1000 x 3000	
mm 1000 x 4050	
mm 1500 x 2000	
Weight kg/m² 21	
tolerance	± mm 5 panel dimensions
	± mm 2 height

IFR-ESD line	Top Coat Polyester with Carbon black conductive powder
---------------------	---

Surface	A	Quartz	Antiskid level R13 V10 norm DIN 51130
----------------	---	--------	---------------------------------------



Reaction to fire	Fire retardant	Spread ≤ 25 norm ASTM E84-98
		ASTM D635 Elapsed time and burned length < 25 mm

Surface and Volume electrical resistivity. Dielectric strength	 Antistatic Dissipative	EN 61340-2.3 Par. 8.1 and 8.2 – IEC 61340-4.1 Par. 5.1.2 ref. ISO 1957 – IEC 61340-4.5 – ASTM D149-97a
---	--	---



LOADS

MAXIMUM SUGGESTED LOADS

Type of support	On the line of the two ends of the panel
Limits determined by	Deflection (load sagging)
the maximum deflection admitted , is 1/200 of the distance between the supports	
According to the standard DIN 24537-3 deviation due to the load may be no more than 1/200 of the panel width and the difference in height between neighbouring joints between loaded and unloaded floor coverings may be no more than 4 mm.	

DISTRIBUTED LOAD			CONCENTRATED LOAD		
					
Distance between supports	Load with deflection equal to 1/200	Load with deflection equal to 1/100	Distance between supports	Load with deflection equal to 1/200	Load with deflection equal to 1/100
[cm]	[kg/m ²]		[cm]	[kg/m]	
50	3800	7600	50	1150	2350
70	1350	2750	70	600	1200
90	650	1300	90	350	700
110	350	700	110	200	450
All lighter loads are admitted					

Limits determined by	Admitted stresses (stress determined by the load)
the maximum admitted stress is 1/5 of the ultimate stress (safety factor is equal to 0.20 – the ultimate stress is 5 times the specified load)	

DISTRIBUTED LOAD		CONCENTRATED LOAD	
			
Distance between supports	Maximum admitted load	Distance between supports	Maximum admitted load
[cm]	[kg/m ²]	[cm]	[kg/m]
50	6950	50	1700
70	3550	70	1200
90	2150	90	950
110	1400	110	750
All lighter loads are admitted			

- The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.
- According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.
- No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M.technical department.
- In case of heavy duty load compressive strength must be verified.