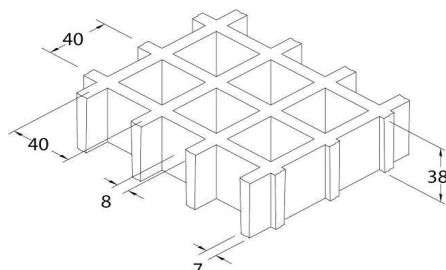


SCH 40/38_ISO

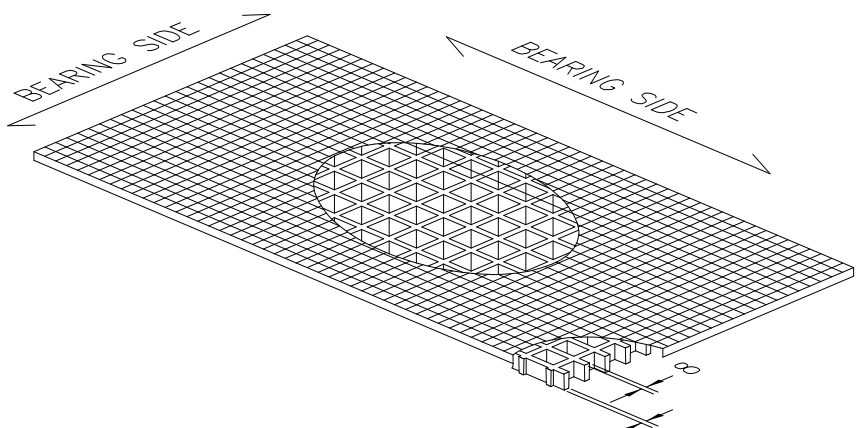
06.05.2011 - Rev. 4

MOLDED GRATINGS

Mesh	mm 40 x 40	
Clear span	mm 32 x 32	
Height	mm 38	
Bearing bar thickness	mm 8 upper part	
	mm 7 bottom part	
Color	Translucent green	

Raw materials	ISOPHTHALIC Polyester Resin
	Roving glass fiber type "E"
	Without inorganic fillers

Resin type	Modulus of elasticity	Ultimate stress
ISO	12250 MPa	310 MPa

Standard panels					
mm 1000 x 2000					
mm 1200 x 3000					
Weight kg/m² 19	<table border="1"> <tr> <td>tolerance</td> <td>± mm 5 panel dimensions</td> </tr> <tr> <td></td> <td>± mm 2 height</td> </tr> </table>	tolerance	± mm 5 panel dimensions		± mm 2 height
tolerance		± mm 5 panel dimensions			
	± mm 2 height				



Surface	S	Smooth	Antiskid level R10 V10 norm DIN 51130
	M	Meniscus	Antiskid level R13 V10 norm DIN 51130
	A	Quartz	Antiskid level R13 V10 norm DIN 51130

Ageing resistance	Ageing test made with UV lamp according to ASTM G154-06 and passed with 5 points on the gray range and without evident defects (test made with 1500 hours of exposure to 4 hours alternate cycles at a UV temperature of 60°C and 4 hours at a condensed temperature of 50°C irradiated by UVB 313 nm lamp, radiance 0,71 W/m ²)
	After the exposure to heat, cold and humidity cycles according to UNI EN ISO 9142/04 norm (n° 21 cycles type D3) there is no evidence of defects



LOADS

MAXIMUM SUGGESTED LOADS

Type of support	On the line of the two ends of the panel
Limits determined by	Deflection (load sagging)
the maximum deflection admitted , is 1/200 of the distance between the supports	
According to the standard DIN 24537-3 deviation due to the load may be no more than 1/200 of the land width and the difference in height between neighbouring joints between loaded and unloaded floor coverings may be no more than 4 mm.	

DISTIBUTED LOAD			CONCENTRATED LOAD			
	Distance between supports	Load with deflection equal to 1/200		Load with deflection equal to 1/100	Distance between supports	Load with deflection equal to 1/200
	[cm]	[kg/m ²]		[cm]	[kg/m]	
	50	3300	6650	50	1000	2050
	70	1200	2400	70	500	1050
	90	550	1100	90	300	600
	110	300	600	110	200	400
All lighter loads are admitted						

Limits determined by	Admitted stresses (stress determined by the load)
the maximum admitted stress is 1/5 of the ultimate stress (safety factor is equal to 0.20 – the ultimate stress is 5 times the specified load)	

DISTIBUTED LOAD			CONCENTRATED LOAD		
	Distance between supports	Maximum admitted load		Distance between supports	Maximum admitted load
	[cm]	[kg/m ²]	[cm]	[kg/m]	
	50	9050	50	2250	
	70	4600	70	1600	
	90	2800	90	1250	
	110	1850	110	1000	
All lighter loads are admitted					

- The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.
- According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.
- No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M.technical department.
- In case of heavy duty load compressive strength must be verified.