

GRATING


SCH40/38C VIN PI CS

TYPE: COVERED

GROUP

LINEA PREMIUM

RESIN: Vynylester -- VIN
REINFORCEMENT: Roving glass fiber type "E"
PROCESS ADDITIVES AND REACTION PROMOTERS:
Without inorganic fillers
PRODUCTION TECHNOLOGY:
RTM sresin transfer moulding
NORM: DIN 24537-3

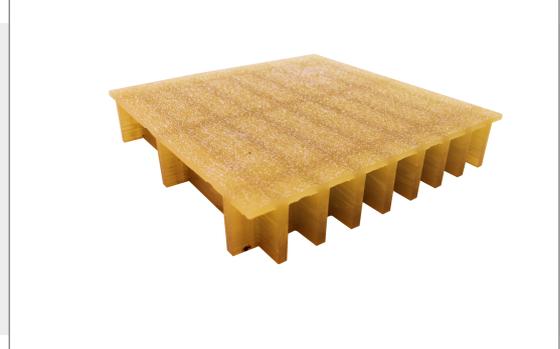

MESH

MAIN MESH (M1)	mm 40x40
----------------	----------

HEIGH (H, H+C1, H+C1+C2)	mm 43
--------------------------	-------

BEARING BAR



UPPER PART (S1)	mm 8
-----------------	------

BOTTON PART (S2)	mm 7
------------------	------

COVER THICKNESS

UPPER PART (C1)	mm 5
-----------------	------

BOTTOM PART (C2)	
------------------	--

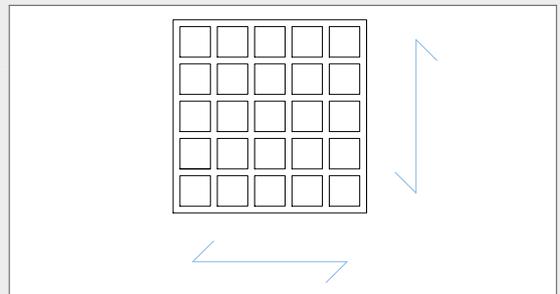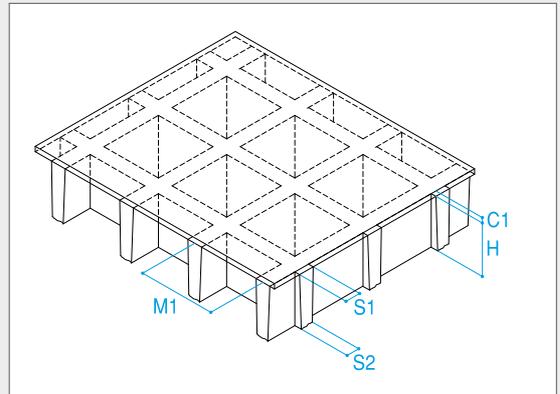

WEIGHT: 27 Kg/m²

PANEL'S BEARING DIRECTION: both

STANDARD FINISHING

Moulded covered "quartz" style - Antiskid level R13 V4 norm DIN 51130

STANDARD PANELS AND COLOURS (Indicative RAL reference)

1000x2000 TRANSLUCENT BROWN

1200x3000 TRANSLUCENT BROWN

TOLERANCE ± 5 mm panel dimensions, $\pm 2/-2$ mm height, $\pm 6\%$ weight.

All finishes different from the standard one (meniscus for gratings with open surface, quartz and chequered for gratings with covered surface) involve a surface processing of the grating that could result in a thickness and weight variation exceeding the indicated tolerances, while maintaining unchanged mechanical characteristics.

GRATING

SCH40/38C VIN PI CS

ELECTRICAL PROPERTIES

Surface resistivity (Rs), transversal electric resistance (Rt)	norm EN 61340-2.3 par. 8.1 e 8.2 con rif. a ISO 1853, IEC 60167, HD568 S1	EXCELLENT INSULATOR
Resistivity and safety electric resistance to ground human body model	norm IEC 61340-4-5 – CEI 64-4/8/6 Par. 6.12.5 – IEC 60167 – HD 568 S1	EXCELLENT INSULATOR
Dielectric strenght	norm ASTM D 149-97a	VERY LOW CURRENT ABSORPTION

AGEING RESISTANCE

Ageing test made with UV lamp according to ASTM G154-06 and passed with 5 points on the gray range and without evident defects (test made with 1500 hours of exposure to 4 hours alternate cycles at a UV temperature of 60°C and 4 hours at a condensed temperature of 50°C irradiated by UVB 313 nm lamp, radiance 0,71 W/m²)

After the exposure to heat, cold and humidity cycles according to UNI EN ISO 9142/04 norm (n° 21 cycles type D3) there is no evidence of defects

REACTION TO FIRE - FLOORING



F _{fi}	norm EN 13501-1	NOT DETERMINED
-----------------	-----------------	----------------

SMOKE DENSITY AND TOXICITY

F1	norm AFNOR NF16-101	
----	---------------------	--



2 SIDES BEARING (L=1000 mm)

L (mm)	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
f (mm)	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0
G (Kg)			1600	1300	1050	870	740	630	540	460	400	350
D (Kg/m²)			8200	4750	3000	2050	1450	1050	800	620	485	390

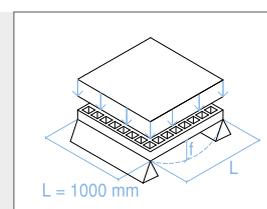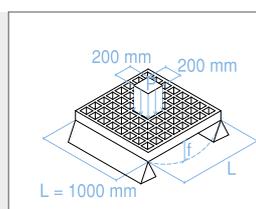



4 SIDES BEARING (equal sides grating)

L (mm)	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
f (mm)	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0
G (Kg)			2100	1650	1350	1200	1050	900	810	740	680	630
D (Kg/m²)			18800	10900	6900	4600	3250	2350	1800	1400	1100	860

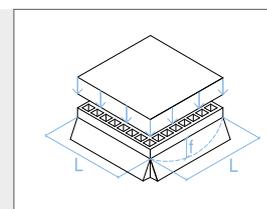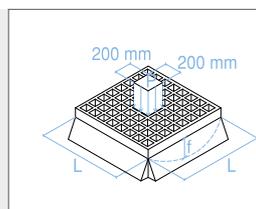

4-POINT BEARING (equal sides grating)

L (mm)	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
f (mm)	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0
G (Kg)			900	710	580	495	430	380	340	305	280	260
D (Kg/m²)			5200	2850	1750	1150	780	560	410	315	245	195

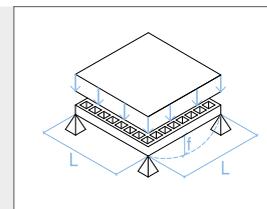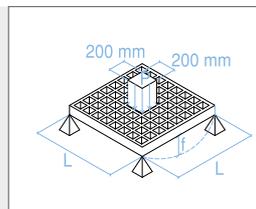

G Concentrated load **D** Distributed load

The previous tables report the accidental loads that, to vary the distance between supports (L), determine one of the following conditions: deflection equal to 1/200 of the distance between supports (L); reaching of the resistance limit (USL).

In case of heavy duty load compressive strength must be verified.

The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.

According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.

No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M. technical department.