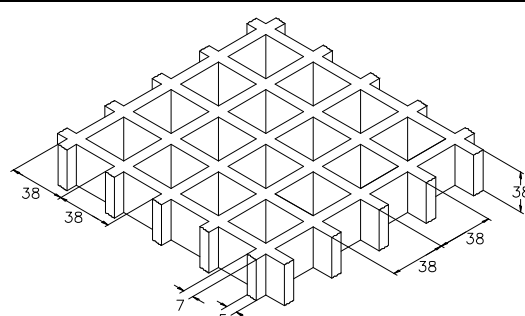


SCH 38/38_CFR

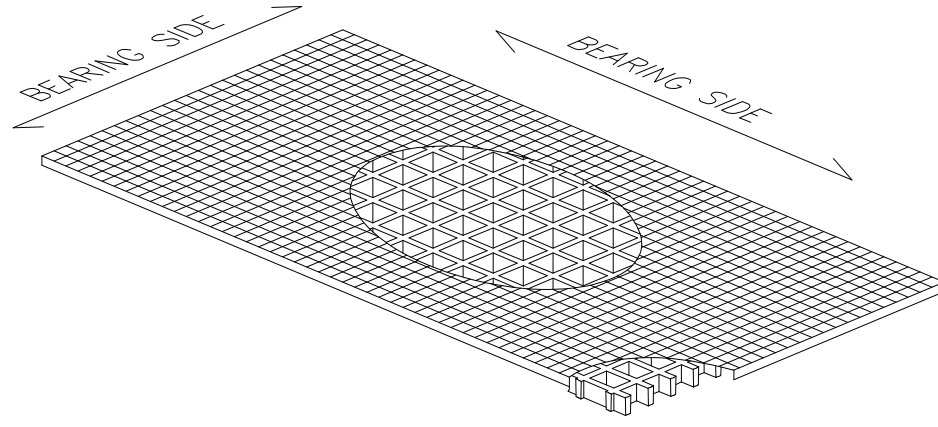
06.05.2011 - Rev. 4

MOLDED GRATINGS

Mesh	mm 38 x 38	
Clear span	mm 31 x 31	
Height	mm 38	
Bearing bar thickness	mm 7 upper part	
	mm 5 bottom part	
Color	Black	

Raw materials	Polyester Resin	
	Roving glass fiber type "E"	
	Inorganic fillers without halogens + Carbon black conductive powder	

Resin type	Modulus of elasticity	Ultimate stress
CFR	15000 MPa	325 MPa

Standard panels	
mm 1000 x 2000	
mm 1000 x 3000	
mm 1000 x 4038	
mm 1220 x 3660	
mm 1220 x 4038	
Weight kg/m² 18	
tolerance	± mm 5 panel dimensions ± mm 2 height

Surface	M	Meniscus	Antiskid level R13 V10 norm DIN 51130
----------------	---	-----------------	--



Reaction to fire	Fire retardant	Spread ≤ 25 norm ASTM E84-98
		ASTM D635 Elapsed time and burned length < 25 mm

Surface and Volume electrical resistivity. Dielectric strength	Excellent Conductivity	EN 61340-2.3 Par. 8.1 and 8.2 – IEC 61340-4.1 Par. 5.1.2 ref. ISO 1957 – IEC 61340-4.5 - ASTM D149-97a
---	-------------------------------	---

LOADS



MAXIMUM SUGGESTED LOADS

Type of support	On the line of the two ends of the panel
Limits determined by	Deflection (load sagging)
the maximum deflection admitted , is 1/200 of the distance between the supports	
According to the standard DIN 24537-3 deviation due to the load may be no more than 1/200 of the land width and the difference in height between neighbouring joints between loaded and unloaded floor coverings may be no more than 4 mm.	

DISTRIBUTED LOAD			CONCENTRATED LOAD		
	Distance between supports [cm]	Load with deflection equal to 1/200 [kg/m ²]		Distance between supports [cm]	Load with deflection equal to 1/100 [cm]
		Load with deflection equal to 1/100			Load with deflection equal to 1/100
50	3350	6750	50	1050	2100
70	1200	2450	70	500	1050
90	550	1150	90	300	650
110	300	600	110	200	400

All lighter loads are admitted

Limits determined by	Admitted stresses (stress determined by the load)
the maximum admitted stress is 1/5 of the ultimate stress (safety factor is equal to 0.20 – the ultimate stress is 5 times the specified load)	

DISTRIBUTED LOAD			CONCENTRATED LOAD		
	Distance between supports [cm]	Maximum admitted load [kg/m ²]		Distance between supports [cm]	Maximum admitted load [kg/m]
50	7600	1900	50	1350	850
70	3850	1350	70	1050	850
90	2300	1050	90	850	
110	1550	850	110		

All lighter loads are admitted

- The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.
- According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.
- No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M.technical department.
- In case of heavy duty load compressive strength must be verified.