

## GRATING


## SCH52/52DC CFR ST

TYPE: DOUBLE COVERED

GROUP

LINEA STANDARD

RESIN: polyester self-extinguishing conductive -- CFR  
REINFORCEMENT: Roving glass fiber type"E"  
PROCESS ADDITIVES AND REACTION PROMOTERS:  
Inorganic fillers without halogens + Carbon black conductive powder  
PRODUCTION TECHNOLOGY:  
RTM sresin transfer moulding  
NORM: DIN 24537-3

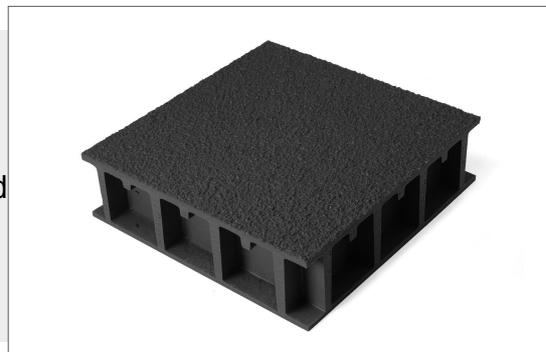

### MESH

MAIN MESH (M1)	mm 52X52
SECONDARY MESH (M2)	mm 26x26



HEIGHT (H, H+C1, H+C1+C2)	mm 58
---------------------------	-------

### BEARING BAR

UPPER PART (S1)	mm 8
BOTTOM PART (S2)	mm 7

### COVER THICKNESS

UPPER PART (C1)	mm 3
BOTTOM PART (C2)	mm 3

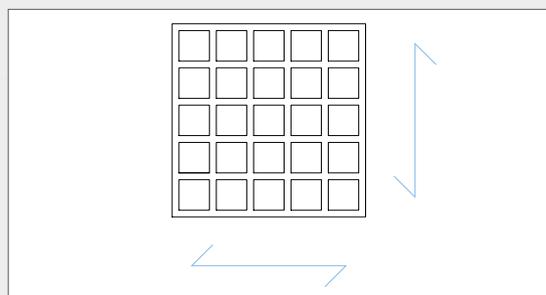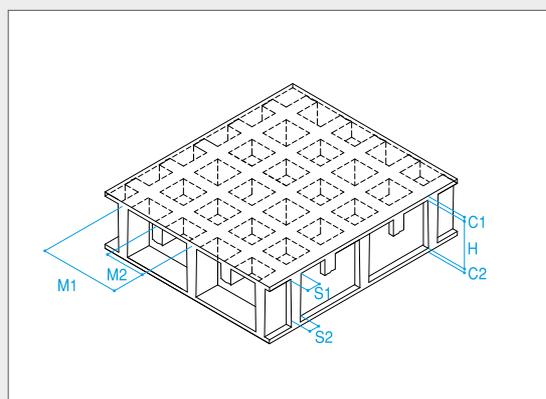

WEIGHT: 39 Kg/m<sup>2</sup>

PANEL'S BEARING DIRECTION: both

### STANDARD FINISHING

Covered with quartz - Antiskid level R13 V4 norm DIN 51130

### STANDARD PANELS AND COLOURS (Indicative RAL reference)

1000x2000 BLACK RAL 9011

1000x3000 BLACK RAL 9011

1000x4050 BLACK RAL 9011

TOLERANCE ± 5 mm panel dimensions, +2/-2 mm height, +/- 6% weight.

All finishes different from the standard one (meniscus for gratings with open surface, quartz and chequered for gratings with covered surface) involve a surface processing of the grating that could result in a thickness and weight variation exceeding the indicated tolerances, while maintaining unchanged mechanical characteristics.

## GRATING

## SCH52/52DC CFR ST

### ELECTRICAL PROPERTIES

Surface resistivity (Rs), transversal electric resistance (Rt)	norm N 61340-2.3 Par 8.1 e 8.2 – IEC 61340-4.1 Par. 5.1.2 con Rif. a ISO 1957 – IEC 61340-4.5	EXCELLENT CONDUCTOR
Resistivity and safety electric resistance to ground human body model	norm CEI 64-4/8/6 Par. 6.12.5 – IEC 61340-5-1 con Rif. a IEC 61010-1	EXCELLENT CONDUCTOR
Dielectric strenght		

### AGEING RESISTANCE

Ageing test made with UV lamp according to ASTM G154-06 and passed with 5 points on the gray range and without evident defects (test made with 1500 hours of exposure to 4 hours alternate cycles at a UV temperature of 60°C and 4 hours at a condensed temperature of 50°C irradiated by UVB 313 nm lamp, radiance 0,71 W/m<sup>2</sup>)

After the exposure to heat, cold and humidity cycles according to UNI EN ISO 9142/04 norm (n° 21 cycles type D3) there is no evidence of defects

### REACTION TO FIRE - FLOORING



B <sub>fl</sub> -s1	norm EN 13501-1	FIRE RETARDANT
---------------------	-----------------	----------------

### SMOKE DENSITY AND TOXICITY

F1	norm AFNOR NF16-101	
----	---------------------	--



#### 2 SIDES BEARING (L=1000 mm)

L (mm)	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
f (mm)	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0
G (Kg)					3000	2450	2050	1750	1500	1300	1100	950
D (Kg/m <sup>2</sup> )					8300	5600	3950	2900	2200	1700	1350	1100

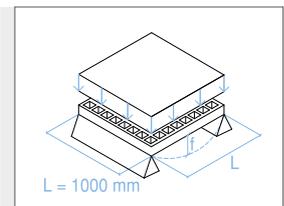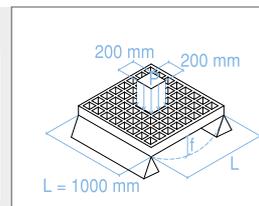



#### 4 SIDES BEARING (equal sides grating)

L (mm)	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
f (mm)	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0
G (Kg)					4150	3550	3100	2750	2500	2250	2100	1950
D (Kg/m <sup>2</sup> )					21100	14100	9900	7300	5500	4200	3300	2650

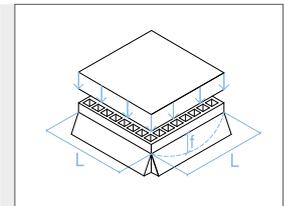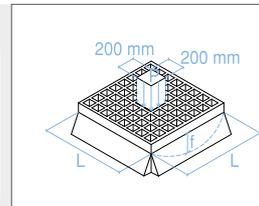

#### 4-POINT BEARING (equal sides grating)

L (mm)	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
f (mm)	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0
G (Kg)				2050	1700	1450	1250	1100	970	880	800	740
D (Kg/m <sup>2</sup> )				8400	5100	3350	2300	1650	1250	930	720	570

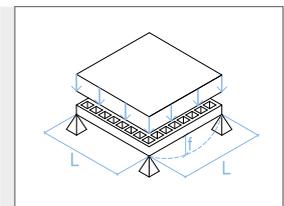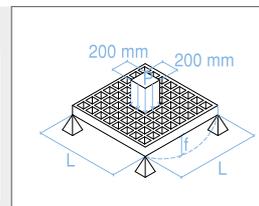

**C** Concentrated load      **D** Distributed load

The previous tables report the accidental loads that, to vary the distance between supports (L), determine one of the following conditions: deflection equal to 1/200 of the distance between supports (L); reaching of the resistance limit (USL).

In case of heavy duty load compressive strength must be verified.

The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.

According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.

No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M. technical department.