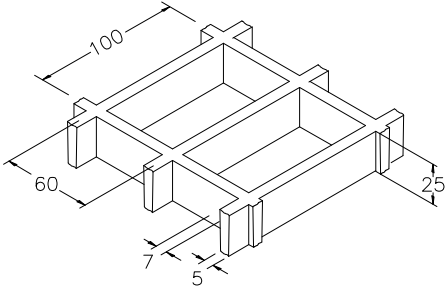


SCH 60/25_CFR


06.05.2011 - Rev. 4

MOLDED GRATINGS

Mesh	mm 100 x 60	
Clear span	mm 93 x 53	
Height	mm 25	
Bearing bar thickness	mm 7 upper part	
	mm 5 bottom part	
Color	Black	

Raw materials	Polyester Resin	
	Roving glass fiber type "E"	
	Inorganic fillers without halogens + Carbon black conductive powder	

Resin type	Modulus of elasticity	Ultimate stress
CFR	15000 MPa	325 MPa

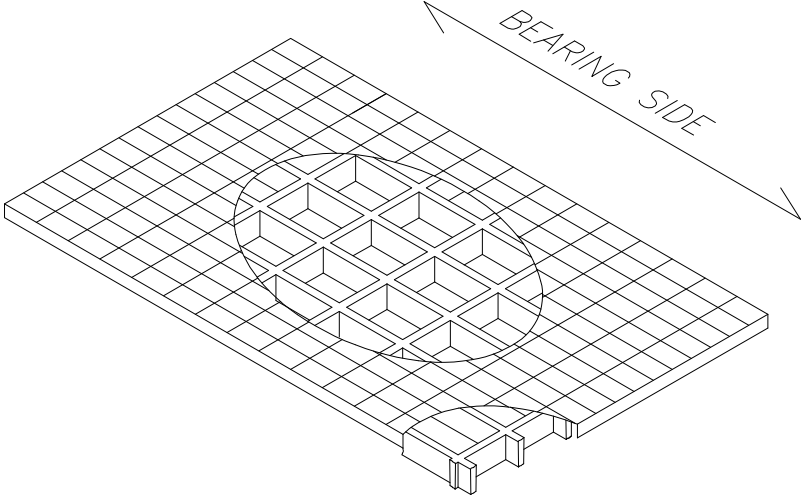Standard panels		
mm 1500 x 2000		
Weight kg/m²	7	
tolerance	± mm 5 panel dimensions	
	± mm 2 height	

Surface	S	Smooth	Antiskid level R10 V10 norm DIN 51130
----------------	---	--------	---------------------------------------

Reaction to fire	Fire retardant	Spread ≤ 25 norm ASTM E84-98
		ASTM D635 Elapsed time and burned length < 25 mm

Surface and Volume electrical resistivity. Dielectric strength	Excellent Conductivity	EN 61340-2.3 Par. 8.1 and 8.2 – IEC 61340-4.1 Par. 5.1.2 ref. ISO 1957 – IEC 61340-4.5 - ASTM D149-97a
-----------------------------------------------------------------------	-------------------------------	--------------------------------------------------------------------------------------------------------