

## GRATING

## SCH52/52C IFR ST C

TYPE: COVERED

GROUP

LINEA STANDARD

RESIN: Polyester self-extinguishing -- IFR  
REINFORCEMENT: Roving glass fiber type"E"  
PROCESS ADDITIVES AND REACTION PROMOTERS:  
Inorganic fillers without halogens  
PRODUCTION TECHNOLOGY:  
RTM sresin transfer moulding  
NORM: DIN 24537-3



### MESH

MAIN MESH (M1)	mm 52X52
SECONDARY MESH (M2)	mm 26x26



HEIGH (H, H+C1, H+C1+C2)	mm 55
--------------------------	-------

### BEARING BAR

UPPER PART (S1)	mm 8
BOTTON PART (S2)	mm 7

### COVER THICKNESS

UPPER PART (C1)	mm 3
BOTTOM PART (C2)	

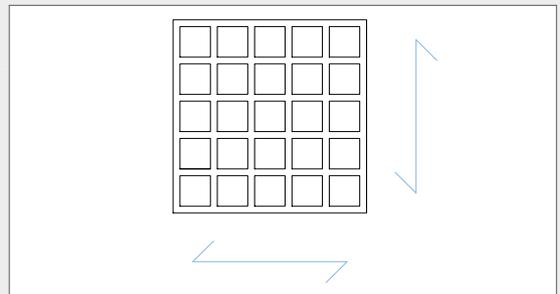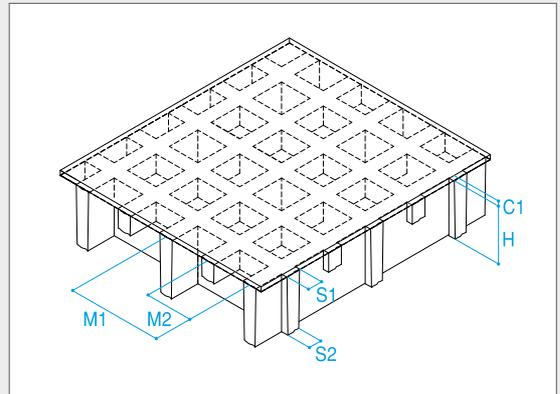

WEIGHT: 34 Kg/m<sup>2</sup>

PANEL'S BEARING DIRECTION: both

### STANDARD FINISHING

Covered with quarz - Antiskid level R13 V4 norm DIN 51130

### STANDARD PANELS AND COLOURS (Indicative RAL reference)

1000x2000 GREY RAL 7004

1000x3000 GREY RAL 7004

1000x4050 GREY RAL 7004

TOLERANCE ± 5 mm panel dimensions, +2/-2 mm height, +/- 6% weight.

All finishes different from the standard one (meniscus for gratings with open surface, quartz and chequered for gratings with covered surface) involve a surface processing of the grating that could result in a thickness and weight variation exceeding the indicated tolerances, while maintaining unchanged mechanical characteristics.

## GRATING

## SCH52/52C IFR ST C

### ELECTRICAL PROPERTIES

Surface resistivity (Rs), transversal electric resistance (Rt)	norm EN 61340-2.3 par. 8.1 e 8.2 con rif. a ISO 1853, IEC 60167, HD568 S1	EXCELLENT INSULATOR
Resistivity and safety electric resistance to ground human body model	norm IEC 61340-4-5 – CEI 64-4/8/6 Par. 6.12.5 – IEC 60167 – HD 568 S1	EXCELLENT INSULATOR
Dielectric strenght	norm ASTM D 149-97a	VERY LOW CURRENT ABSORPTION

### AGEING RESISTANCE

Ageing test made with UV lamp according to ASTM G154-06 and passed with 5 points on the gray range and without evident defects (test made with 1500 hours of exposure to 4 hours alternate cycles at a UV temperature of 60°C and 4 hours at a condensed temperature of 50°C irradiated by UVB 313 nm lamp, radiance 0,71 W/m<sup>2</sup>)

After the exposure to heat, cold and humidity cycles according to UNI EN ISO 9142/04 norm (n° 21 cycles type D3) there is no evidence of defects

### REACTION TO FIRE - FLOORING



B <sub>fl</sub> -s1	norm EN 13501-1	FIRE RETARDANT
---------------------	-----------------	----------------

### SMOKE DENSITY AND TOXICITY

F1	norm AFNOR NF16-101	
----	---------------------	--



#### 2 SIDES BEARING (L=1000 mm)

L (mm)	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
f (mm)	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0
G (Kg)					1550	1300	1100	950	810	700	610	540
D (Kg/m <sup>2</sup> )					4850	3300	2300	1700	1300	990	780	630

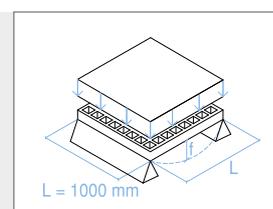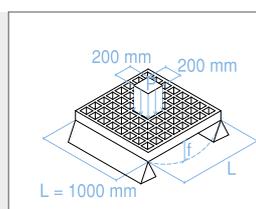



#### 4 SIDES BEARING (equal sides grating)

L (mm)	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
f (mm)	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0
G (Kg)					1950	1650	1450	1300	1200	1050	970	900
D (Kg/m <sup>2</sup> )					9700	6500	4600	3350	2500	1950	1550	1250

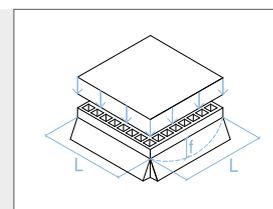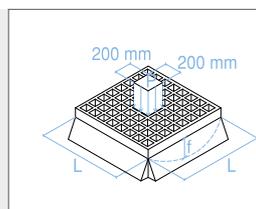

#### 4-POINT BEARING (equal sides grating)

L (mm)	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
f (mm)	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0
G (Kg)				1150	920	780	670	590	530	475	435	400
D (Kg/m <sup>2</sup> )				4600	2800	1800	1250	880	650	490	380	300

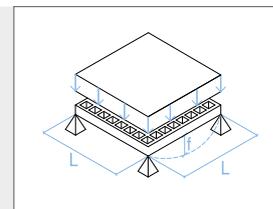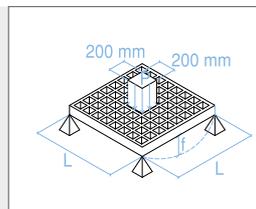

**G** Concentrated load      **D** Distributed load

The previous tables report the accidental loads that, to vary the distance between supports (L), determine one of the following conditions: deflection equal to 1/200 of the distance between supports (L); reaching of the resistance limit (USL).

In case of heavy duty load compressive strength must be verified.

The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.

According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.

No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M. technical department.