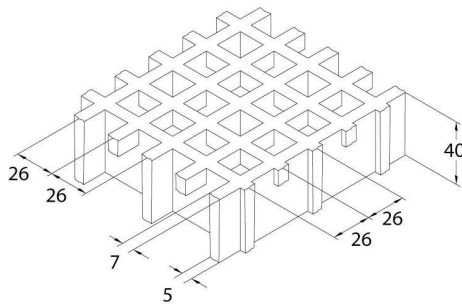


SCH 52/40_ISO

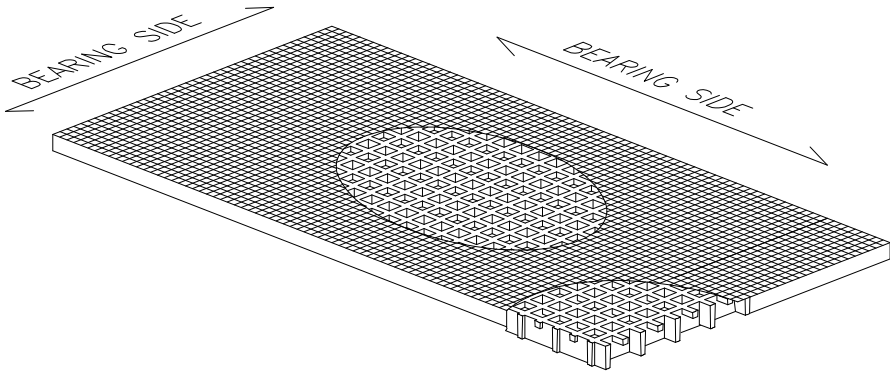
06.05.2011 - Rev. 4

MOLDED GRATINGS

Mesh	mm 52 x 52 main	
	mm 26 x 26 secondary	
Clear span	mm 19 x 19	
Height	mm 40	
Bearing bar thickness	mm 7 upper part	
	mm 5 bottom part	
Color	Translucent green	

Raw materials	ISOPHTALIC Polyester Resin
	Roving glass fiber type "E"
	Without inorganic fillers

Resin type	Modulus of elasticity	Ultimate stress
ISO	12250 MPa	310 MPa

Standard panels	
mm 1000 x 2000	
mm 1000 x 3000	
mm 1000 x 4050	
Weight kg/m² 19	
tolerance	± mm 5 panel dimensions
	± mm 2 height



Surface	S	Smooth	Antiskid level R10 V10 norm DIN 51130
	M	Meniscus	Antiskid level R13 V10 norm DIN 51130
	A	Quartz	Antiskid level R13 V10 norm DIN 51130

Ageing resistance	Ageing test made with UV lamp according to ASTM G154-06 and passed with 5 points on the gray range and without evident defects (test made with 1500 hours of exposure to 4 hours alternate cycles at a UV temperature of 60°C and 4 hours at a condensed temperature of 50°C irradiated by UVB 313 nm lamp, radiance 0,71 W/m²)
	After the exposure to heat, cold and humidity cycles according to UNI EN ISO 9142/04 norm (n° 21 cycles type D3) there is no evidence of defects

LOADS



MAXIMUM SUGGESTED LOADS

Type of support	On the line of the two ends of the panel
Limits determined by	Deflection (load sagging)
the maximum deflection admitted , is 1/200 of the distance between the supports	
According to the standard DIN 24537-3 deviation due to the load may be no more than 1/200 of the land width and the difference in height between neighbouring joints between loaded and unloaded floor coverings may be no more than 4 mm.	

DISTRIBUTED LOAD			CONCENTRATED LOAD		
	Distance between supports [cm]	Load with deflection equal to 1/200 [kg/m ²]		Distance between supports [cm]	Load with deflection equal to 1/200 [cm]
		Load with deflection equal to 1/100			Load with deflection equal to 1/100
50	3100	6200	50	950	1900
70	1100	2250	70	450	950
90	500	1050	90	300	600
110	250	550	110	200	400

All lighter loads are admitted

Limits determined by	Admitted stresses (stress determined by the load)
the maximum admitted stress is 1/5 of the ultimate stress (safety factor is equal to 0.20 – the ultimate stress is 5 times the specified load)	

DISTRIBUTED LOAD			CONCENTRATED LOAD		
	Distance between supports [cm]	Maximum admitted load [kg/m ²]		Distance between supports [cm]	Maximum admitted load [kg/m]
50	6650	1650	50	1650	
70	3400	1150	70	1150	
90	2050	900	90	900	
110	1350	750	110	750	

All lighter loads are admitted

- The above characteristics are meant as reference values for standard material in ambient working temperature. Even if they are not to be considered as guaranteed characteristics they are based on our experience and are supplied in good faith.
- According to the standard DIN 24537-3 the conversion safety factor should be 0.75 for internal environmental exposure conditions, 0.65 for external exposure conditions, and 0.50 for aggressive exposure conditions.
- No matter which are the exposure conditions, chemical resistance must be always verified by contacting M.M.technical department.
- In case of heavy duty load compressive strength must be verified.